

10-ZONE LED WITH PANIC KEYS

Model 692 Security Command

Description

The new DMP 692 Security Command is a highly attractive, user friendly LED keypad with three optional 2-button Panic keys and is designed for use with DMP XR10 Command Processor™ Panels. The 16 LEDs on the 692 include three system status LEDs, three armed status LEDs, and ten zone LEDs. The 692 also includes an easy to read backlit keyboard with large alphanumeric characters, simple Command key arming, and an integral alert buzzer. The 692 is housed in a stylishly designed, durable plastic housing with removable base for easy installation. The keypad housings can be ordered in one of several decorator colors to compliment a variety of room decors.

Status LEDs

The 692 provides Ready, Trouble, and Power system status LEDs that inform users at a glance the current condition of their system. There are also Armed, Stay, and Instant status LEDs that show users the current armed state of the system and can help decrease false alarms.

Easy Arming and Disarming

Most system functions, such as arming and disarming, are done by just entering a user code number. An additional programming option allows the Command key along with the 1,2, and 3 keys to be used instead of a user code for arming the system. The user can also partially arm the system by just pressing the Stay or Special keys. This simplicity and ease of use gives greater confidence to the user and can reduce service calls for additional training.

2-Button Panic Keys

The 692 keypad's top row of function keys can be used as 2-button Panic keys to let the user easily send Panic, non-medical Emergency, or Fire reports to the central station. A label is provided to identify the correct keys to the user.

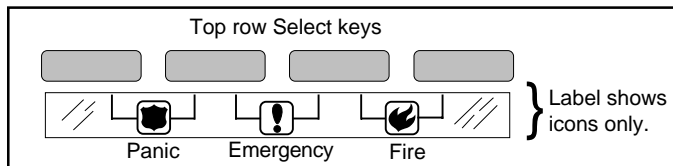


Figure 1: Panic key label placement

Keyboard Backlighting

The 692 also illuminates the keyboard in Green whenever a key is pressed or the internal buzzer sounds. This allows users to easily enter their code or perform a command function in very low light conditions.



System Features

- Three system LEDs: Ready, Trouble, and Power inform users at a glance the system status
- Three armed status LEDs: Armed, Stay, and Instant
- 10 individual zone LEDs
- 2-button Panic keys for Panic, Emergency, and Fire
- No addressing required - use as many as you need
- Simply enter user code to arm or disarm
- One key arming for Perimeter or Sleep modes
- Zone monitoring feature for All, Perimeter, or individual zones
- Requires only 4-wire cable from panel
- Single keypad up to 750' on 22 gauge wire
- Four short tones inform the user of an unsuccessful keypad operation
- Audible tone on each key press
- Audible entry delay tone
- Ambush code
- Quick key for adding, deleting, or changing user codes
- Zone LEDs indicate normal, trouble, bypassed, and alarm conditions
- Relay output control from keypad
- Change user codes from keypad
- Bypass individual zones

Specifications

Voltage	8.5 to 15 VDC
Current	30mA standby - 75mA maximum
Dimensions	6.8" W x 5.0" H x 1.1" D
Mountings	Surface, 4-square, or 3-gang switch box

